



# PTFE Housings with Glass Bowls

Virgin PTFE construction  
 Pyrex glass bowls  
 7 bar pressure rating  
 Element can be monitored visually



122PG

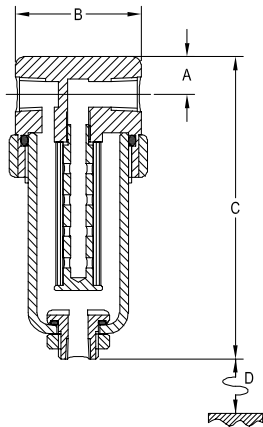

130PG

The Headline range of PTFE housings is extended by the availability of these versions with pyrex glass bowls. The condition of the filter element can be monitored visually which is important in systems where slugs of condensate may occur.

## Principal Specifications

Housing Model	120PG	122PG	130PG	132PG
Port Size - NPT	1/8"	1/4"	1/4"	1/2"
Drain - NPT	1/8"	1/8"	1/8"	1/8"
Maximum Pressure - Bar	7	7	7	7
Max. Temperature °C	100	100	100	100
<b>Materials of Construction (1)</b>				
Head & Internals	PTFE	PTFE	PTFE	PTFE
Bowl	Pyrex	Pyrex	Pyrex	Pyrex
Gaskets	Viton	Viton	Viton	Viton
<b>Principal Dimensions</b>				
A - mm	15	15	15	15
B - mm	50	50	68	68
C - mm	110	110	135	135
D - mm	62	62	70	70
Volume - cc	63	63	155	155
Weight - kg	0.3	0.3	0.6	0.6
<b>Accessories</b>				
Gasket Set	GV120PG	GV120PG	GV130PG	GV130PG
Mounting Bracket	MB110	MB110	MB130	MB130
<b>Filter Element Codes (2)</b>				
Disposable Element	12-57-xx	12-57-xx	25-64-xx	25-64-xx
PTFE Element	PT-12-57-xx	PT-12-57-xx	PT-25-64-xx	PT-25-178-xx

Notes (1) Material abbreviations, PTFE = Polytetrafluoroethene, Pyrex = Borosilicate glass  
 (2) Replace 'xx' with grade required, e.g. 12-57-50C, PT-25-178-03